

**Ratings**

Temperature: -40 ~ 70 °C  
Voltage: 150 V

**Conductor**

Gauge: 28 AWG, 0.081 mm<sup>2</sup>  
Material: tinned copper strands  
Stranding:  $\phi$  0.05 x 40  
Resistance at 20 °C: 240  $\Omega$ /km

**Insulator**

Material: HDPE  
Color: black, white, red  
Outer diameter:  $\phi$  0.7  $\pm$  0.10 mm  
Nominal thickness: 0.15 mm  
Resistance at 20 °C: 1000 M $\Omega$ /km

**Shield**

Type: spiral  
Material: tinned copper strands  
Strand size:  $\phi$  0.08 mm  
Coverage: 90 % minimum

**Outer jacket**



Material: TPU, 70 °C  
Color: cool gray 1C  
Nominal thickness: 0.55 mm  
Diameter:  $\phi$  2.8  $\pm$  0.15 mm

**Filler**

Material: aramid fiber

**Tests**

Tensile strength: 35.7 kgf  
Dielectric test: 1500 V dc for 1 minute without breakdown  
Bend test at 200 g,  $\pm$ 90 °, 30 cycles /min: 15,000 cycle minimum

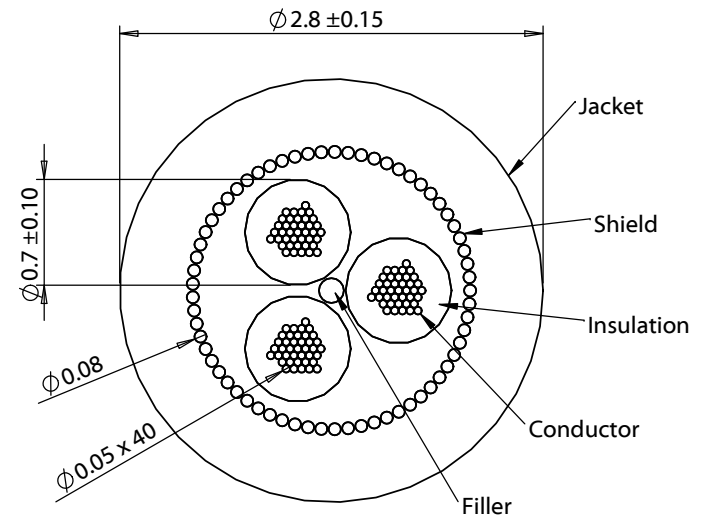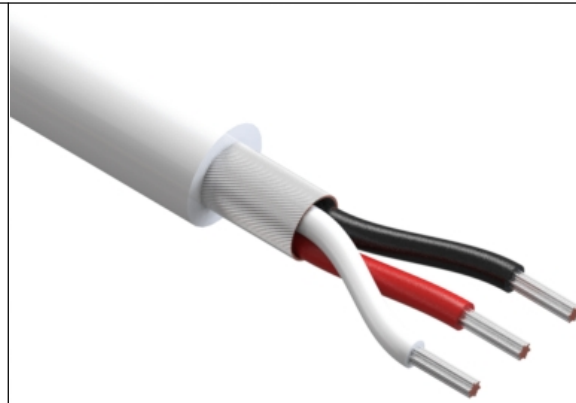

| REVISION | DATE      | DESCRIPTION                              |
|----------|-----------|--|
| A        | 3/31/2015 | Initial release                          |
| A1       | 6/29/2015 | removed conductive coating on insulation |
| A2       | 1/13/2016 | updated note, corrected tolerances       |
| A3       | 1/17/2019 | Changed filler material to generic name  |

PREPARED:

VERIFIED:

DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:  
X:  $\pm$  0.5 mm  
X.X:  $\pm$  0.3 mm  
X.XX:  $\pm$  0.05 mm

NOTES

RoHS and REACH compliant

Jacket meets ISO 10993 Biological Compatibility

Phthalate and halogen free

Function test: no open, no short, no intermittent

DESCRIPTION:  
Wire, 3C TS, 28 AWG, 150V, 70C, 2.8 mm, spiral shield, TPU, white, WBL

**TENSILITY**

20802 Sockeye Place #130  
Bend, OR 97701 USA  
tel 541.323.3228 fax 541.323.4202  
800 877.670.7118 www.tensility.com

|      |             |
|------|-------------|
| SIZE | PART NUMBER |
| A    | 30-00456    |

SCALE: 1:1

SHEET 1 OF 1