


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00333	Connector, dc jack, 4.75x1.7xL17.5 mm, molding style	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00004	Overmold, black, PVC	1	

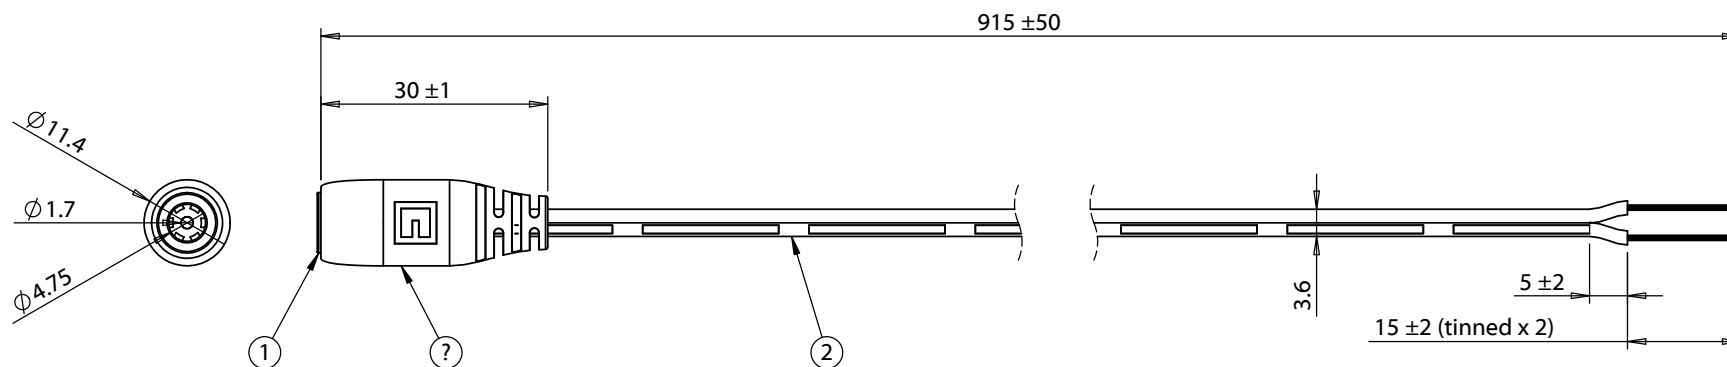

Wiring diagram	
50-00333	Wire Color
Center	Black with stripe
Sleeve	Black

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	TENSILITY 20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com		
A	6/27/2012	Initial release		RoHS and REACH compliant			
A1	1/18/2013	updated connector and overmold	VERIFIED:	Function test: no open, no reversed polarity, no short circuit, no INT	4.5 A, 48 Vdc Functionally equivalent components may be used		
			DIMENSIONS ARE IN MILLIMETERS	DESCRIPTION:			
			TOLERANCES:	Cable, 915 mm, 4.75x1.7 mm 50-00333 dc jack to stripped tinned, 24 AWG, 30-00003 wire	SIZE	PART NUMBER	
			X: ± 0.5 mm		A	10-01116	
			X.X: ± 0.3 mm		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1
			X.XX: ± 0.05 mm				